


Thermoslab In Slab Heating Cable

For installation in the slab of new builds

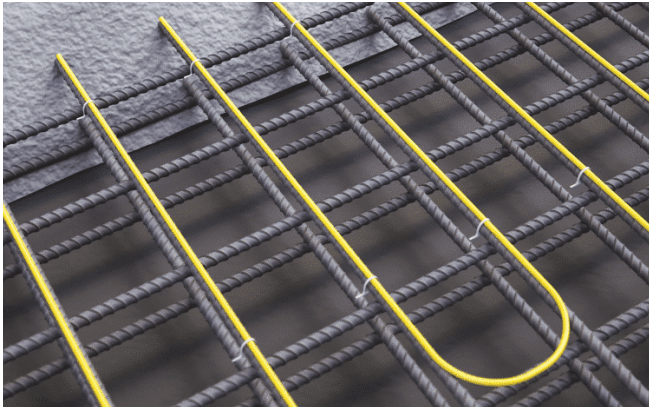


Thermoslab is a brilliantly versatile, robust 7mm thick underfloor heating cable designed for use in slab.

Install the cable in the concrete slab of new builds to create an energy efficient thermal mass under your floor.

To work out which heating cable is required, multiply the square metres of your area by 5 to give the required linear metres of cable.

Stock Code	Length (m)	Area (m ²)*	Output (W)	Amps (A)	Resistance (Ω)
3138	10	2.0	300	1.25	176.33
3139	20	4.0	600	2.50	88.17
3141	30	6.0	900	3.75	58.78
3142	37	7.4	1100	4.58	48.09
3145	50	10.0	1500	6.25	35.27
3147	60	12.0	1800	7.50	29.39
3148	67	13.4	2010	8.38	26.45
3152	84	16.8	2500	10.42	21.16
3155	100	20.0	3000	12.50	17.63
3156	112	22.4	3350	13.96	15.79
3158	134	26.8	4020	16.75	13.16
3160	150	30.0	4500	18.75	11.76
3161	170	34.0	5100	21.25	10.37
3163	185	37.0	5500	22.92	9.56
3164	200	40.0	6000	25.00	8.82

*Based on approximately 150W/m² for installation onto the mesh with a cable spacing of 200mm.

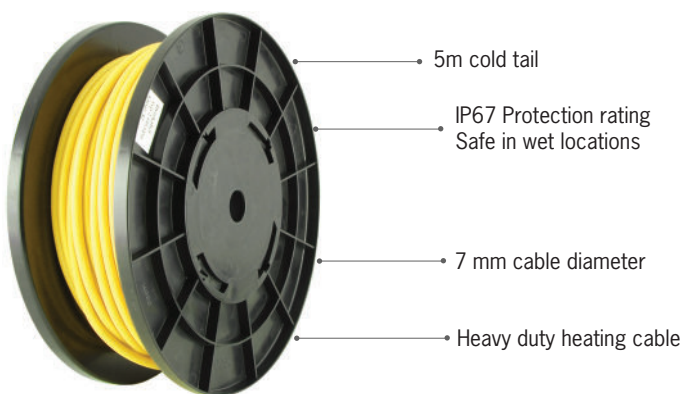

Technical data

Thickness	7mm
Max. Temperature	28°C*
Protection Rating	IP67
Warranty	Lifetime Warranty
Wattage	30W/LM
Conductor Type	Single Ended
Cold Tail Length	5m

*Regulated by floor sensing thermostat