


Econoboard Uncoated Insulation


For installation beneath underfloor heating on a concrete substrate

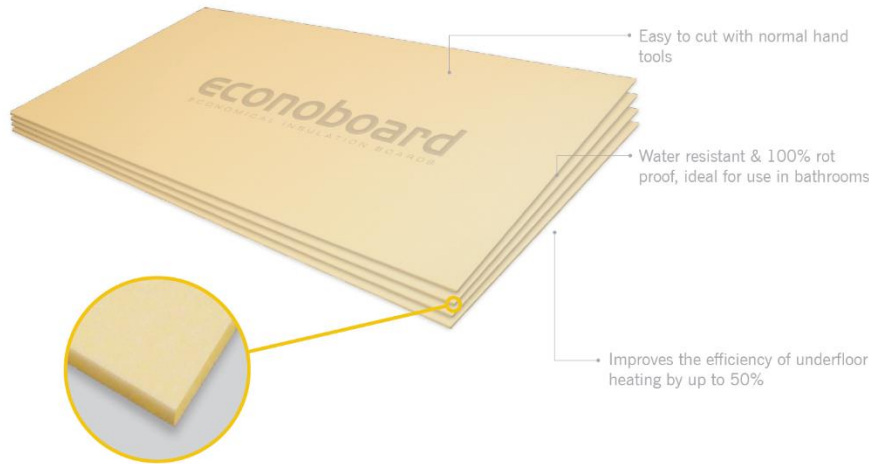

Board Size	1.2 x 0.6
Board Area	0.72m ²
Thermal Conductivity	0.033W/MK
Compressive Strength	300 kpa
Water Absorption	0.6% by vol
Temperature Range	-50°C to +75°C

Installation Overview

Solid concrete floors and screeds absorb the cold and damp from below. Econoboard should be used before tiling to inhibit moisture and prevent heat loss into the substrate. Econoboard is 100% rot proof and ideal for use in bathrooms and wetrooms.

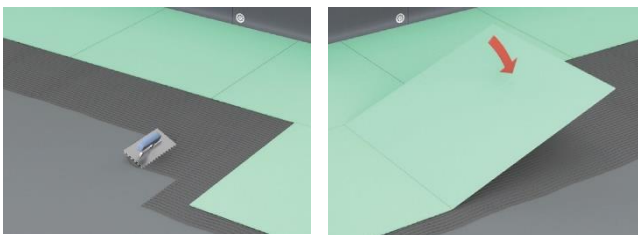

1. Ensure the concrete substrate is free from dust and any debris.
2. Mix tile adhesive according to manufacturer guidelines and spread on substrate with a notched trowel.
3. Fix in position by pressing the boards firmly into the adhesive.

Stock Code	Thickness (mm)	Pack Quantity	Pack Area (m ²)	R Value m ² k/w
6012	6	20	14.4	0.18
6014	10	10	7.2	0.30