


# Thermofoil 140W/m<sup>2</sup> Heating Foil

For installation under timber, laminate or carpet




- 1 Floating timber floor
- 2 Econosoft overlay
- 3 Thermofoil 140W/m<sup>2</sup> heating foil
- 4 Econosoft underlay
- 5 Econoboard coated insulation board (optional)
- 6 Flexible tile adhesive
- 7 Concrete substrate

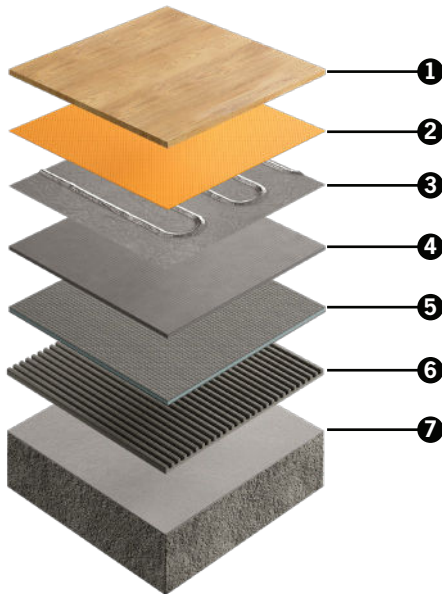

### Lifetime Warranty

We are so confident in the quality of Thermofoil that we give each system a warranty that lasts a Lifetime.



### Efficient heat exchange foil

The double layer of foil in Thermofoil is specifically designed to protect the heating element and achieve an even spread of heat to the floor above.



### Easy cut and return installation

The accessible cable loops are an example of Thermogroup's product innovations. They make cut and return installation quick and easy while protecting the heating element.



### Continuous earth protection braid

Electrical safety is paramount and Thermofoil's continuous earth braid protection runs the entire length of the heating cable.



### Minimal height build-up

The foil system is only 2.5mm thick with a low profile cold tail of only 4mm thick, which can be concealed within the insulation. Required underlay and overlay will add to the total height build-up.



Technical Data	
Width	500mm
Thickness	2.5mm*
Max. Temperature	28°C**
Protection Rating	IPX7
Warranty	Lifetime
Wattage	140W/m <sup>2</sup>
Conductor Type	Single Ended
Cold Tail Length	5m

\*Cold tail is 4mm thick. Required underlay and overlay will add to the total build-up.

\*\*Regulated by floor sensing thermostat.

## Installation Accessories

Essential overlay and underlay systems for a long lasting floating heated floor construction.



### 5400 Econosoft Cushioning Underlay

All Thermofoil installations require a cushioning underlay. Econosoft is a 5mm cushioning underlay that can be used for any Thermofoil installation. This can be substituted for standard carpet or hard floor underlay.



### 5421 Econosoft Overlay

An essential cushioning overlay that also acts as a vapour and acoustic barrier and should be included above Thermofoil in every installation.

## Thermofoil 140W/m<sup>2</sup> Foil Heating System

Stock Code	Length (m)	Area (m <sup>2</sup> )*	Output (W)	Amps (A)	Resistance (Ω)
121402	2 x 0.5	1.0	140	0.58	337.9
121403	3 x 0.5	1.5	210	0.88	251.9
121404	4 x 0.5	2.0	280	1.17	188.9
121405	5 x 0.5	2.5	350	1.46	151.1
121406	6 x 0.5	3.0	420	1.75	126.0
121408	8 x 0.5	4.0	560	2.33	94.5
121410	10 x 0.5	5.0	700	2.92	75.6
121412	12 x 0.5	6.0	840	3.50	63.0
121414	14 x 0.5	7.0	980	4.08	53.9
121416	16 x 0.5	8.0	1120	4.67	47.2
121418	18 x 0.5	9.0	1260	5.25	41.9
121420	20 x 0.5	10.0	1400	5.83	37.8
121424	24 x 0.5	12.0	1680	7.00	31.5

## Thermofoil Installation Accessories

Stock Code	Description	Size	Unit
5400	Econosoft Cushioning Underlay	1200 x 500 x 5mm	(6m <sup>2</sup> ) pk 10
5421	Econosoft Acoustic Overlay	10m x 1m	Ea
3255	Fixing Tape	36mm x 25m	Ea